

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	5.90m	19ft 4in
Max. Platform Height B	3.90m	12ft 10in
Overall Length C	1.44m	4ft 9in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	1.96m	6ft 5in
Overall Height(Rails Down) F	1.56m	5ft 1in
Platform Size(Length×Width)	1.29m×0.70m	4ft 3in×2ft 4in
Ground Clearance(Stowed/Raised)	0.06m	2in
Wheelbase H	1.10m	3ft 7in
Tyres	φ150×50mm	φ150×50mm

Performance		
S.W.L	240kg	529lb
Max. Occupants	1	1
Max. Working Slope	1°	1°
Up/Down Speed	38/25sec	38/25sec

Weight		
Overall Weight	530kg	1168lb

Power		
Hydraulic Tank	3L	3L
Battery	12V/85Ah	12V/85Ah
Charger	12V/15A	12V/15A
Lifting Motor	12VDC/0.8kW	12VDC/0.8kW

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

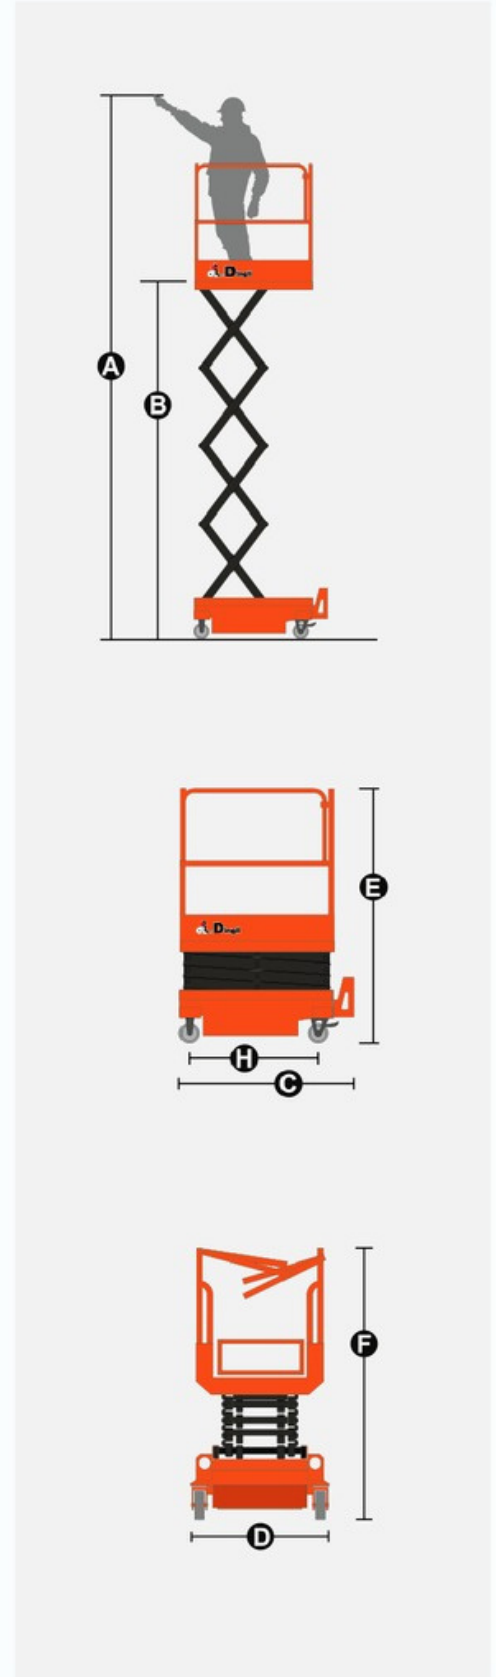

FEATURES

Standard Items

- Self-Locking Gates
- Four-Wheel Braking
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- One-Way Platform Extension Deck
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System

Optional Items

Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform



** Factory default, if you have other needs, please contact EPS.

ACCESS SPECIALTIES®

104 Carbine Road, Auckland
P.0800 DINGLI (346 454)
E. Brendan@accessspecs.co.nz
www.accessspecs.co.nz